ENSTO

It makes sense. Finally!

Ensto electrical heating systems



Better life. With electricity.

Ensto's panel heaters and floor heating thermostats are equipped with a smart electronic thermostat and can easily be controlled from a

Smart thermostats with mobile app

It makes sense. Finally!

Smart heating control provides you with comfort and flexibility. Ensto's panel heaters and floor heating thermostats are equipped with a smart electronic thermostat which means that they can easily be controlled by a mobile device.


The Ensto Heat Control application allows you to control Ensto heaters and floor heating thermostats that are equipped with Bluetooth technology. You can create a weekly or longer-term program for your desired period, as well as being able to track their impact on your home's energy consumption. Using Ensto Heat Control App to manage your home heating is easy, efficient and reliable.

What you can do on the app:

- Temperature management
- > Selecting a thermostat mode:
 - Floor
 - Room
 - Combination
 - Power
- > Calendar programs
 - Set a required temperature and starting time
- > Holiday periods
 - Longer period temperature changes
- Boost
 - Temporary temperature change

- Manage schedules
 - Day-to-day with six temperature change cycles
- Reduce energy costs (energy consumption monitoring)
 - Current energy consumption
 - Weekly and annual energy consumption
 - Weekly temperature monitoring

The app can help you control heating, edit settings, update your product and more

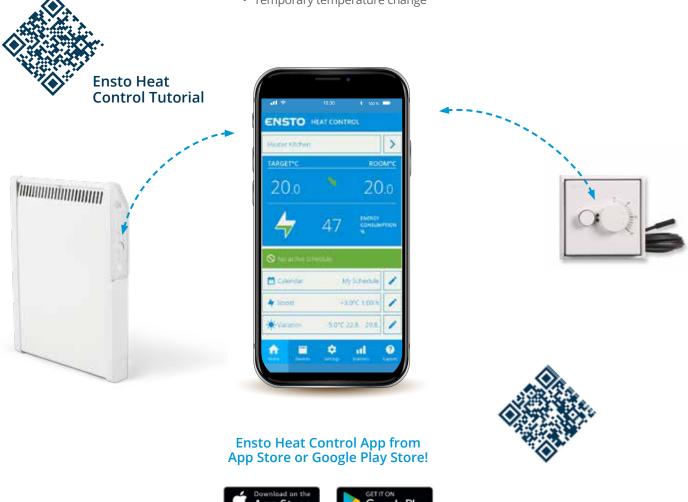

Ensto Beta heaters

With connection box or plug

Beta heaters can be installed in both dry and damp areas (IP21). The heaters also have a low surface temperature due to the X-shaped heating element. The heaters can be wall mounted or free standing (with separate feet).

BETA-EB

- > Connection box
- > RAL9010 colour
- > Extremely accurate and completely silent intelligent thermostat, accuracy +/-0.1°C
- > Fast reaction to temperature changes, which helps to increase comfort and ensures an even room temperature
- > The heater's surface temperature is low thanks to the intelligent thermostat
- > Manage intelligent functions with the Ensto Heat Control App
- > Standby consumption <0.3W

BETA-MP

- > Mechanical thermostat and plug
- > RAL9010 colour
- > Accurate temperature control with +/-0.5°C thermostat accuracy
- > A mechanical thermostat is better able to withstand network disturbances and is therefore suitable for use in cottages etc.

Ensto Beta heaters with intelligent thermostat and connection box

Beta heaters meet the Ecodesign requirements. The new heaters are equipped with intelligent thermostats (6 - 30°C) that can be controlled manually or with the Ensto Heat Control App (Android and iOS). The Ensto Heat Control application permits calendar control, boost and holiday function, and also the monitoring of heating consumption. Nominal voltage 230 V + 10%, -15%. Protection class IP21. Height of the heater is 389mm.

Old product code Old GTIN	New product code New GTIN	Description	Pkg./Pallet	
EPHBE02B 6418677635359	BETA2-BT-EB 6438100339401	250 W, 389x451 mm	1	40
EPHBE05B 6418677632020	BETA5-BT-EB 6438100339357	500 W, 389x585 mm	1	30
EPHBE07B 6418677632037	BETA7-BT-EB 6438100339364	750 W, 389x719 mm	1	30
EPHBE10B 6418677632044	BETA10-BT-EB 6438100339319	1000 W, 389x853 mm	1	20
EPHBE15B 6418677632051	BETA15-BT-EB 6438100339326	1500 W, 389x1121 mm	1	20
EPHBE20B 6418677632068	BETA20-BT-EB 6438100339340	2000 W, 389x1523 mm	1	26



New Smart

Product Codes!

BETA2-BT-EB

Portable Ensto Beta heaters with mechanical thermostat and Euro plug

Portable Beta heaters meet the Ecodesign requirements. Portable heaters are equipped with mechanical thermostats (6 - 36°C), Euro plug and heater legs. The accuracy of the thermostat is +/- 0.5°C. Thanks to the control wheel and a simple scale, adjusting the temperature is easy. Nominal voltage 230 V +10%, -15%. Protection class IP21. Height of the heater with legs is 460 mm.

Old product code Old GTIN	New product code New GTIN	Description	Pkg./Pallet
EPHBM02P	BETA2-MP	250 W, 389x451 mm	1 40
6418677635786	6438100339395		1 40
EPHBM05P	BETA5-MP	500 W, 389x585 mm	1 30
6418677631832	6438100339418		1 30
EPHBM07P	BETA7-MP	750 W, 389x719 mm	1 30
6418677631849	6438100339425		1 30
EPHBM10P	BETA10-MP	1000 W, 389x853 mm	1 20
6418677631856	6438100339371		1 20
EPHBM15P	BETA15-MP	1500 W, 389x1121 mm	1 20
6418677631863	6438100339388		1 20
EPHBM20P	BETA20-MP	2000 W, 389x1523 mm	1 26
6418677631870	6438100339401		1 26



BETA2-MP



Ensto Finland Oy Ensio Miettisen katu 2, P.O. Box 77 FIN-06101 Porvoo, Finland ensto@ensto.com

ensto.com



